



AUS-iot EM 1P LSx - xxx



Overview

The **AUS-iot EM 1P LSx** is a LoRa-enabled single-phase electricity meter rated at **100A**, designed for accurate real-time monitoring and seamless integration into the AUS-iot System backend software. It supports automated billing, detailed consumption analysis, and energy management for residential, commercial, and industrial applications.

With secure LoRaWAN connectivity, the EM 1P LSL ensures reliable long-range data transmission while maintaining low power consumption. Operators can easily integrate the device through the AUS-iot System suite for full property and utility management or connect via API or simple CSV exchange for third-party platforms.

Real-time alerts for faults, abnormal consumption, or tampering are delivered via mobile app or email, enabling fast response, improved safety, and reduced operational costs.

Compact, robust, and field-proven, the AUS-iot EM 1P LSL offers a cost-effective, scalable solution for modern single-phase electricity monitoring, making it ideal for deployment across utilities, estates, and smart infrastructure projects.

DISCLAIMER: The information contained in this datasheet is provided as is and without any warranties of any kind, whether expressed or implied. The contents of this datasheet are for general information purposes only. LoRa® is a trademark of Semtech Corporation. © Automated Utility Systems (2025/01)


Features

• Input Voltage: 220VAC (80%~120%)	• Long distance communication up to 15 km
• Input Current: 0.5~10(100)A	• Life: 10+ year / Ultra-low power
• Input Frequency: 50/60 Hz	• LoRaWAN Class A
• Parameters: V, A, Hz, PF, kWh, kVARh	• Approved for use in SA, AUS, EU
• Sensor: Shunt / Direct connection	• Installation: Vertical DIN Rail
• Network: L+N	• Operating Temperature: -25°C to 55°C
• Configurable Data Upload	• Dimensions (WxHxD): 100x36x63mm
• Compliance: IEC 62052-11 / IEC 62053-21 / IEC 62055-41 / IEC 62056-21	

Accuracy

• Accuracy: Class 1 IEC 62053-21	
• Voltage : 0.5% of range maximum	• Active power(W): ±1% of range max
• Current: 0.5% of nominal	• Reactive power(VAr): ±1% of range max
• Frequency: 0.2% of mid-frequency	• Apparent power(VA): ±1% of range max
• Power factor: 1% of unity (0.01)	• Active energy(Wh): Class 1 IEC 62053-21

Dimensions

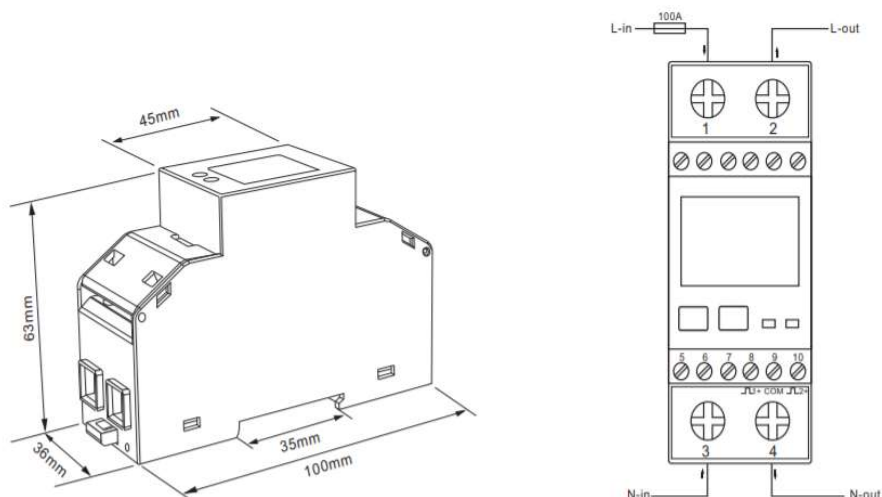

Order Code

Product	Type	Phase	Comms	Sensor	Control	Radio Band
AUS-iot	EM - Electricity Meter	1P – Single Phase	L – LoRa	S – Shunt	x – No Control;	868 - South Africa 915 - Australia

DISCLAIMER: The information contained in this datasheet is provided as is and without any warranties of any kind, whether expressed or implied. The contents of this datasheet are for general information purposes only. LoRa® is a trademark of Semtech Corporation. © Automated Utility Systems (2025/01)